




LITHIUM LINE

NEW PRM350 MPPT SOLAR CHARGE REGULATOR FOR PHOTOVOLTAIC MODULE

The PRM350 solar charge regulator can charge lead (liquid, gel and AGM) and lithium 12V batteries automatically controlling and limiting the energy supplied by the connected photovoltaic modules. It features a MPPT (Maximum Power Point Tracker) system that allows picking in every situation of the maximum power supplied by the photovoltaic module.

MODEL	PRM350
BATTERY RATED VOLTAGE	12V
MAXIMUM VOLTAGE OF THE PHOTOVOLTAIC MODULE IN OPEN CIRCUIT (V _{oc})	50V
MAX POWER PHOTOVOLTAIC MODULES	300W (32+40 cells) – 350W (41+72 cells)
MAXIMUM OUTPUT CURRENT	25A
NUMBER OF PHOTOVOLTAIC MODULES CONNECTIONS	2
PERFORMANCE	>95%
END-OF-CHARGE VOLTAGE	14,1V (A) - 14,4V (B) - 14,7V (C) - 14,6V (L)
FLOAT VOLTAGE	13,5V (A) - 13,8V (B) - 13,8V (C) - 13,8V (L)
NUMBER OF CHARGE LINES	4
BATTERY DESULPHATION	Electronic
REVERSE CURRENT BLOCKING PROTECTION	YES
REVERSE POLARITY PROTECTION	YES
TEST PANEL CONNECTION	PT 742
SELF-CONSUMPTION	0A (In the absence of sunlight, the regulator switches off completely)
AUTOMATIC SHUTDOWN	In the absence of sunlight
DIMENSIONS (mm)	150 x 110 H48

CSB3-LT

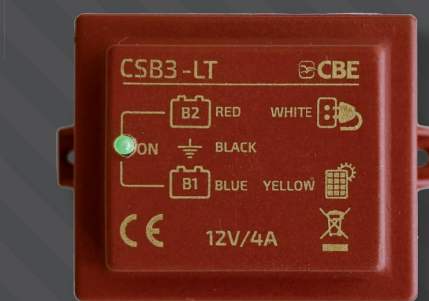

LITHIUM LINE

CAR BATTERY AUTOMATIC RECHARGING DEVICE

For photovoltaic modules and for battery chargers, through the service battery. This device is suitable for operation with lithium service batteries and is installed close to the batteries, thus avoiding connecting the car battery to the solar charge regulator. It charges the car battery with a current from 0,1A to max 4A, depending on the battery status and giving priority to the service battery. When the green LED is on, it means that the CSB3-LT is ready to recharge the car battery if necessary. Dimensions: 80 x 50 x 50mm

CB522-LT



LITHIUM LINE

CB522-LT SWITCHING BATTERY CHARGER

The new CB522-LT switch-mode battery charger has been designed for the charge of 12V lithium batteries only. It is protected against overtemperature and the 12V outputs are protected against short circuit and polarity inversion.

MODEL	CB522-LT
TECHNICAL DATA	
NOMINAL INPUT VOLTAGE	230Vac±10%
FREQUENCY	50Hz±60 Hz
MAX POWER	320W
PROTECTION FUSE	3,15A (glass 5 x 20)
ON/OFF SAFETY SWITCH	230V
OUTPUT TECHNICAL DATA	
BULK VOLTAGE (V)	14,5V
FLOAT VOLTAGE (V)	13,5V
MAX CURRENT	22A continuous
CHARGING LINE	IUoU
BATTERY TYPE SELECTOR	NO
SHORT-CIRCUIT AND POLARITY INVERSION PROTECTION	30A (blade)
THERMAL PROTECTION	YES
SIGNAL AC POWER SUPPLY (S)	12V; 50 mA
GENERAL TECHNICAL DATA	
EFFICIENCY	86 %
ROOM TEMPERATURE	0 ÷ 40°
VENTILATION	Forced, variable automatic regulation
PROTECTION DEGREE	IP 30
MAINS CONNECTION	Schuko socke
BATTERY CONNECTION	"M6" screw
CASE	Nylon + fiber glass self-extinguishing
DIMENSIONS (MM)	180 x 190 x 85H
WEIGHT	1,2kg
COLOUR	Graphite black

LITHIUM LINE



- ◆ PRM350 MPPT SOLAR CHARGE REGULATOR
- ◆ CAR BATTERY AUTOMATIC RECHARGING DEVICE **CSB3-LT**
- ◆ **CB522-LT** SWITCHING BATTERY CHARGERS
- ◆ **NE287** SWITCHING BATTERY CHARGER Provided by NORDELETRONICA
- ◆ **NE325** DC-DC POWER CONVERTER Provided by NORDELETRONICA
- ◆ **PRS350** SOLAR CHARGE REGULATORS
- ◆ **PT750 / NE363** PANEL TEST

NE287

Provided by
NORDELETRONICA®NE325-25A
NE325-40AProvided by
NORDELETRONICA®

PRS350



PT750 / NE363



LITHIUM LINE

NE287 SWITCHING
BATTERY CHARGER

The NE287 is a battery charger for lead, gel, AGM and lithium batteries. The batteries must have a nominal voltage of 12V and capacity suitable for the battery charger current (check compatibility of the maximum charging current with the technical data sheet for the battery to be connected). The NE287 also work as a power supply unit.

MODEL	NE287-17A	NE287-21A
TECHNICAL DATA		
NOMINAL INPUT VOLTAGE	230Vac± 10%	230Vac± 10%
FREQUENCY	50Hz±60 Hz	50Hz±60Hz
MAX POWER	250W	300W
PROTECTION FUSE	4A	4A
OUTPUT TECHNICAL DATA		
MAX CURRENT	17A continuous	21A continuous
SHORT-CIRCUIT PROTECTION	YES	YES
OVER-LOAD PROTECTION	YES	YES
OVER VOLTAGE PROTECTION	YES	YES
OVER TEMPERATURE PROTECTION	YES	YES
OVER TEMPERATURE BATTERY PROTECTION	YES (optional with NTC sensor)	YES (optional with NTC sensor)
THERMAL PROTECTION	YES	YES
BATTERY TYPE SELECTOR	Dip-switch 4 position	Dip-switch 4 position
CHARGING LINE	IUoU - AGM / IUoU - GEL / IUoU -Pb / IUoU -LiFePO4	IUoU - AGM / IUoU - GEL / IUoU -Pb / IUoU -LiFePO4
SIGNAL AC POWER SUPPLY (S)	12V (MAX 5mA)	12V (MAX 5mA)
GENERAL TECHNICAL DATA		
EFFICIENCY	86 %	86%
ROOM TEMPERATURE	0 ÷ 50°	0 ÷ 50°
VENTILATION	NO	YES
PROTECTION DEGREE	IP 20	IP 20
MAINS CONNECTION	3 poles IEC EN60320 C14	3 poles IEC EN60320 C14
BATTERY CONNECTION	"M5" screw	"M5" screw
DIMENSIONS (mm)	167x170x73mm	167x170x73mm
WEIGHT	1,5kg	1,5 Kg
COLOUR	Black	Black

LITHIUM LINE

NE325 DC-DC POWER
CONVERTER

The DC/DC converter NE325 is suitable for recharging the service battery with the alternator. The alternators of Euro 6 engines often provide a charge voltage that is too low and therefore a DC/DC converter is required to charge the service battery with the vehicle is running.

MODEL	NE325-25A	NE325-40A
TECHNICAL DATA		
NOMINAL INPUT VOLTAGE	11Vdc - 15Vdc	11Vdc - 15Vdc
MAXIMUM CURRENT INPUT	37A @11V	48A @11V
PROTECTION FUSE	30A on the negative pole	30A on the negative pole
OUTPUT TECHNICAL DATA		
MAX CURRENT	25A continuous	40A continuous
SHORT-CIRCUIT PROTECTION	YES	YES
OVER-LOAD PROTECTION	YES	YES
OVER VOLTAGE PROTECTION	YES	YES
OVER TEMPERATURE PROTECTION	YES	YES
OVER TEMPERATURE BATTERY PROTECTION	YES (optional with NTC sensor)	YES (optional with NTC sensor)
BATTERY TYPE SELECTOR	Dip-switch 4 position	Dip-switch 4 position
CHARGING LINE	IUoU - AGM / IUoU - GEL / IUoU -Pb / IUoU -LiFePO4	IUoU - AGM / IUoU - GEL / IUoU -Pb / IUoU -LiFePO4
INPUT D+ SIGNAL	12V	12V
GENERAL TECHNICAL DATA		
EFFICIENCY	90 %	90 %
ROOM TEMPERATURE	0 ÷ 50°	0 ÷ 50°
VENTILATION	NO	YES
PROTECTION DEGREE	IP 20	IP 20
MAINS CONNECTION	"M5" screw	"M5" screw
BATTERY CONNECTION	"M5" screw	"M5" screw
DIMENSIONS (mm)	167x170x73mm	167x170x73mm
WEIGHT	1,3 kg	1,3 Kg
COLOUR	Black	Black

LITHIUM LINE

PRS350 SOLAR CHARGE
REGULATOR

The solar charge regulator PRS350 is compatible with 12V photovoltaic modules. Designed and developed with cutting-edge electronics, they offer high electrical performance and very low heat dissipation.

MODEL	PRS350
RATED VOLTAGE	12V
MAXIMUM VOLTAGE OF THE PHOTOVOLTAIC MODULE IN OPEN CIRCUIT (Voc)	27V
MAX POWER PHOTOVOLTAIC MODULES	350W
MAXIMUM OUTPUT CURRENT	20A
NUMBER OF PHOTOVOLTAIC MODULES CONNECTIONS	2
END-OF-CHARGE VOLTAGE	14,1V (A) - 14,3V (B) - 14,7V (C) - 14,5V (Li)
FLOAT VOLTAGE	13,5V (A) - 13,8V (B) - 13,6V (C) - 13,5V (Li)
NUMBER OF CHARGE LINES	4
BATTERY DESULPHATION	YES (except the lithium charge line)
REVERSE CURRENT BLOCKING PROTECTION	Electronic
REVERSE POLARITY PROTECTION	YES
TEST PANEL CONNECTION	PT 742
SELF-CONSUMPTION	0A (In the absence of sunlight, the regulator switches off completely)
AUTOMATIC SHUTDOWN	In the absence of sunlight
DIMENSIONS (mm)	115 x 90 H37

LITHIUM LINE

DIGITAL TOUCH TEST
PANEL

With OLED display showing the charge status (%) of lithium and conventional batteries. Displays State of Charge (SoC), battery voltage and current -150A + 150A. With minimum brightness adjustment. Complete with shunt and cable L =5m. Built-in or wall-mounted version with supplied spacer; complete with Berker "BMAC1C" frame including the possibility for combination with "Modular Plates" and "Modular Plates Berker" series.